

DUNN'S FISH FARMS OF ARKANSAS INC.

DUNN'S MFG. COMPANY


P.O. Box 10
1050 Minnow Farm Road
Monroe, AR, 72108
Phone (800) 433-2950
Fax ((870) 589-2029
Sales@dunnsfishfarm.com
www.dunnsfishfarm.com

TOOLS REQUIRED 2 - 7/16 SOCKETS OR OPEN END WRENCHES (not included)
MATERIALS REQUIRED 2 - LONG STYROFOAM FLOATS
2 - SHORT STYROFOAM FLOATS
8 - MOUNTING BRACKETS
2 - FLIPPERS
12 - BOLTS, 8 WASHERS, 12 NUTS

1. PLACE TRAP ON LEVEL SURFACE.
2. REMOVE TOP CORNER BOLT. (WE RECOMMEND REMOVING ONE BOLT AT A TIME) FIGURE 1
3. ATTACH LONG TAB OF BRACKET (FIGURE 2) TO THE TRAP USING THE HARDWARE INCLUDED AND TIGHTEN. REPEAT PROCESS UNTILL THE TOPS OF ALL EIGHT BRACKETS ARE ATTACHED.
4. TAKE THE LONG STYROFOAM FLOAT AND PLACE IT IN THE BRACKETS ON THE LONG SIDE OF TRAP.
*BRACKETS MAY NEED TO BE BENT OUT A LITTLE ALLOW THE FLOAT TO SLIDE IN PLACE.
5. USE THE ENCLOSED HARDWARE TO FASTEN BOTTOM OF BRACKET AS DONE IN STEP 3. ALSO MAKE SURE FLOAT IS FLUSH TO THE EDGE OF THE TRAP. (FIGURE 2)
6. ONCE THIS IS DONE REPEAT THE PROCESS ON THE SHORT FLOATS, MAKING SURE THE CORNERS ARE FLUSH.
7. THE FLIPPERS ARE NUMBERED TO INSURE PROPER FIT. MATCH NUMBER ON FLIPPER TO NUMBER ON HINGE AND ATTACH.(FIGURE 3)
SOME FLIPPERS MAY DRAG DUE TO THE DIFFERENCE IN HINGES. IF THIS OCCURS, PLACE 4 SMALL FLAT WASHERS BETWEEN THE FLIPPER AND TH HINGES, LETTING THE BOLT FIRST THROUGH THE FLIPPER, THE WASHER, AND THEN THROUGH THE HINGES. (FIGURE 3)

NOTE: TIE OFF THE TRAP WHERE IT WILL NOT FLOAT INTO SHALLOW WATER.

Figure 1

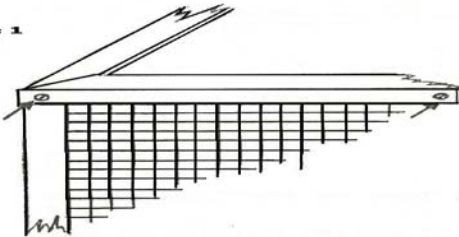

Long tab connects at the top of the trap.

Figure 2

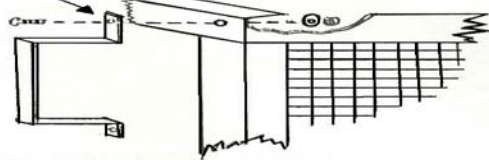


Figure 3


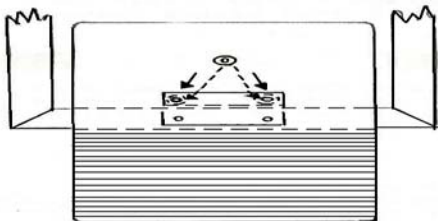


Figure 4

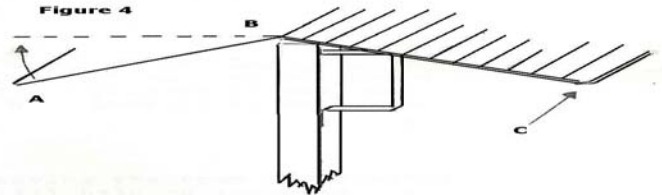

FOR HELP OR INFORMATION ABOUT THIS PRODUCT CONTACT US AT SERVICE@DUNNSFISHFARM.COM OR (800) 433-2950